

# SECOND TARGET STATION (STS) PROJECT

## Interface Sheet for Moderator Reflector Assembly and Instrument Systems



Jim Janney  
Igor Remec  
Ken Herwig

**3/24/2023**

## DOCUMENT AVAILABILITY

Reports produced after January 1, 1996, are generally available free via US Department of Energy (DOE) SciTech Connect.

**Website** [www.osti.gov](http://www.osti.gov)

Reports produced before January 1, 1996, may be purchased by members of the public from the following source:

National Technical Information Service  
5285 Port Royal Road  
Springfield, VA 22161  
**Telephone** 703-605-6000 (1-800-553-6847)  
**TDD** 703-487-4639  
**Fax** 703-605-6900  
**E-mail** [info@ntis.gov](mailto:info@ntis.gov)  
**Website** <http://classic.ntis.gov/>

Reports are available to DOE employees, DOE contractors, Energy Technology Data Exchange representatives, and International Nuclear Information System representatives from the following source:

Office of Scientific and Technical Information  
PO Box 62  
Oak Ridge, TN 37831  
**Telephone** 865-576-8401  
**Fax** 865-576-5728  
**E-mail** [reports@osti.gov](mailto:reports@osti.gov)  
**Website** <http://www.osti.gov/contact.html>

This report was prepared as an account of work sponsored by an agency of the United States Government. Neither the United States Government nor any agency thereof, nor any of their employees, makes any warranty, express or implied, or assumes any legal liability or responsibility for the accuracy, completeness, or usefulness of any information, apparatus, product, or process disclosed, or represents that its use would not infringe privately owned rights. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the United States Government or any agency thereof. The views and opinions of authors expressed herein do not necessarily state or reflect those of the United States Government or any agency thereof.

**S01020500-IS0023-R01**

SECOND TARGET STATION (STS) PROJECT

**Interface Sheet for Moderator Reflector Assembly and Instrument Systems**

Date Published: 3/24/2023

Prepared by  
OAK RIDGE NATIONAL LABORATORY  
Oak Ridge, TN 37831-6283  
managed by  
UT-BATTELLE, LLC  
for the  
US DEPARTMENT OF ENERGY  
under contract DE-AC05-00OR22725

Approvals

Interface Sheet for Moderator Reflector Assembly and Instrument Systems

ISSUE DATE:  
3/24/2023

PREPARED BY  
Jim Janney

PROJECT  
Second Target Station

DOCUMENT NUMBER:  
S01020500-IS0023

	Signature / Date					
	Rev. 00	Date	Rev. 01	Date	Rev. 02	Date
Moderator Reflector Assembly Task Leader	Jim Janney	5/2/2022	Jim Janney			
Instrument Systems Level 2 Manager	Ken Herwig	5/17/2022	Leighton Coates			
Instrument Systems Engineering Manager	Van Graves	5/5/2022	Van Graves			
Target Systems Level 2 Manager	Peter Rosenblad	5/4/2022	Peter Rosenblad			
Neutron Production Systems Team Leader	Daniel Lyngh	5/3/2022	Daniel Lyngh			
Neutronics Team Leader	Igor Remec	5/2/2022	Igor Remec			

Revision	Description
00	Initial Release
01	QIKR moved to ST04, moderator vertical plane adjustment to reflect preliminary MRA engineering and current target assembly height, guide entrance distances updated

**TABLE OF CONTENTS**

TABLE OF CONTENTS..... v

1. Purpose ..... 6

2. Scope ..... 6

    2.1 Interfacing Parts or Components ..... 6

3. Acronyms and Definitions ..... 6

4. References ..... 6

    4.1 Documents Applicable to the Interfacing SSCs ..... 6

5. Interface Definition..... 7

    5.1 Technical Description of the Interface ..... 7

    5.2 Interface Data..... 7

## 1. PURPOSE

This document defines the Neutron Beam layout and characteristics of the interfaces between Moderator Reflector Assembly and Instrument Systems neutron scattering instruments and bunker. The interface described in this document will provide guidance to the designs of the Moderator Reflector Assembly, neutron scattering instruments and Bunker Systems. Moderator locations and neutronic characteristics are all key inputs into the design and optimization of the neutron scattering instruments.

## 2. SCOPE

The scope of this document is the Neutron Beam layout and characteristics interface between Moderator Reflector Assembly and Instrument Systems as identified in the parent Interface Control Document S01020500-IC0004 [1] between Target Systems and Instrument Systems. The scope of this document does not include the physical hardware connections such as the core vessel seal between Target Systems and Instrument Systems.

### 2.1 INTERFACING PARTS OR COMPONENTS

No.	Components (Moderator Reflector Assembly)		Components (Instrument Systems)	
	Name	Functional reference Number	Name	Functional reference Number
1	Moderator Reflector Assembly	S03040000-M8U-8800-A001	Instrument Systems	S04000000-M8U-8800-A10000
2				
3				
4				

## 3. ACRONYMS AND DEFINITIONS

ICD	Interface Control Document
IS	Interface Sheet
MRA	Moderator Reflector Assembly
SSC	Structure, System or Component
STS	Second Target Station
WBS	Work Breakdown Structure

## 4. REFERENCES

### 4.1 DOCUMENTS APPLICABLE TO THE INTERFACING SSCS

Ref	Document Titles	Document Control System Location
[1]	S01020500-IC0004	<a href="https://edrm.ornl.gov/federaldox/#/irl/0902f41f804c5af3?dataSourceId=ORNL_PRD&amp;versionLabel=CURRENT">https://edrm.ornl.gov/federaldox/#/irl/0902f41f804c5af3?dataSourceId=ORNL_PRD&amp;versionLabel=CURRENT</a>
[2]	Second Target Station Conceptual Design Report	<a href="https://edrm.ornl.gov/federaldox/#/irl/0902f41f80099f74?dataSourceId=ORNL_PRD&amp;versionLabel=CURRENT">https://edrm.ornl.gov/federaldox/#/irl/0902f41f80099f74?dataSourceId=ORNL_PRD&amp;versionLabel=CURRENT</a>
[3]	Second Target Station Neutron Beam Size Report	To Be Released

[4]	Preliminary Moderator Optimization Report	To Be Released
[5]	Moderator Selection Report	To Be Released

## 5. INTERFACE DEFINITION

### 5.1 TECHNICAL DESCRIPTION OF THE INTERFACE

In the STS design, a pulsed proton beam is converted to pulsed high brightness cold neutron beams optimized for neutron scattering experiments. The Target Systems group is responsible for designing a Target Assembly to produce neutrons from the pulsed proton beam and a Moderator Reflector Assembly to convert the neutrons emitted from the target to cold neutron beams useful for neutron scattering experiments on the instruments designed by Instrument Systems group. The Instruments Systems group is responsible for the design of the neutron optics modules within the target monolith and all beamline components outside the monolith.

The number of moderators, number of beamlines, and angular orientation of the beamlines to be included in the STS design have been determined during the conceptual design phase of the project [2] while the characteristics of those neutron beams such as the size of the viewed area of the moderator [3], the maximum acceptance aperture of the guide entrance, the distance of the guide entrance from the viewed face of the moderator, and the desired neutron beam characteristics have been determined by the Instrument Systems group in collaboration with the Target Systems group during early preliminary design.

The two moderator types under consideration provide opportunity to best match moderator neutronics performance to neutron instrument requirements. Relevant moderator figures-of-merit continue to be peak brightness, time-averaged brightness, and the time distribution of neutrons emitted from the moderator face typically provided as FWHM (neutron pulse widths) for initial evaluation. Optimizing each moderator for both peak and time-average brightness separately has established useful bounding performance values, while middle configurations balance performance between the two [4]. Optimizing moderator geometry for maximum time-average brightness comes at the expense of broader neutron time distributions and consequently lower wavelength resolution, while optimizing for peak brightness comes at the expense of flux on sample.

Early in preliminary design, the Neutronics Team has completed a moderator optimization which determined optimal MRA configurations for peak brightness, time-average brightness, and a middle configuration between the two for each moderator [4]. Source files for all configurations for both moderators were supplied to the Instrument Systems group for further evaluation. After detailed analysis on representative instruments, the Instrument Systems group decided that the middle configuration the best instrument performance for both the upper, cylinder moderator and lower, tube moderator [5].

### 5.2 INTERFACE DATA

#### 5.2.1 Moderator Performance Parameters

The neutron beam characteristics of the chosen configuration are illustrated below as a series of emission time distributions (ETD), peak and time-averaged brightness, and ETD FWHM plots. Additionally, the source files from the neutronics simulation of the chosen configuration are attached.

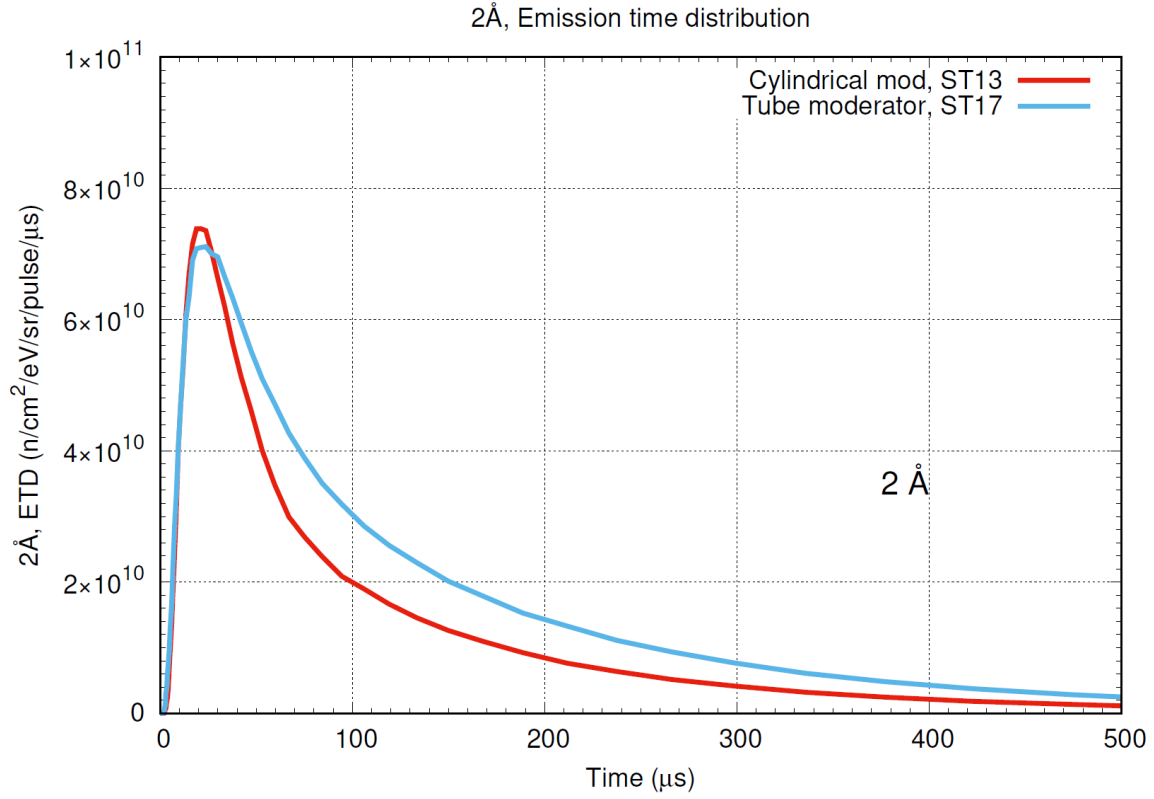


Figure 1. Emission time distribution for the chosen optimized configurations of the 2 moderators at 2Å.

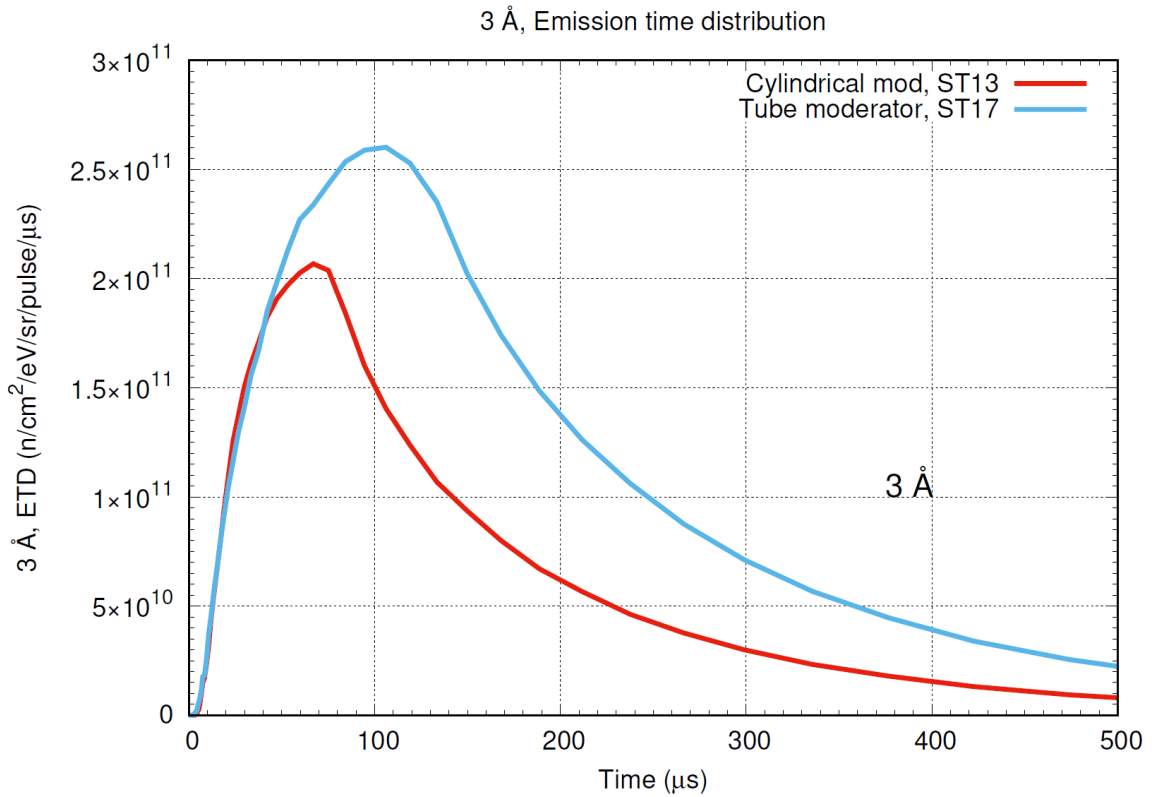


Figure 2. Emission time distribution for the chosen optimized configurations of the 2 moderators at 3Å.



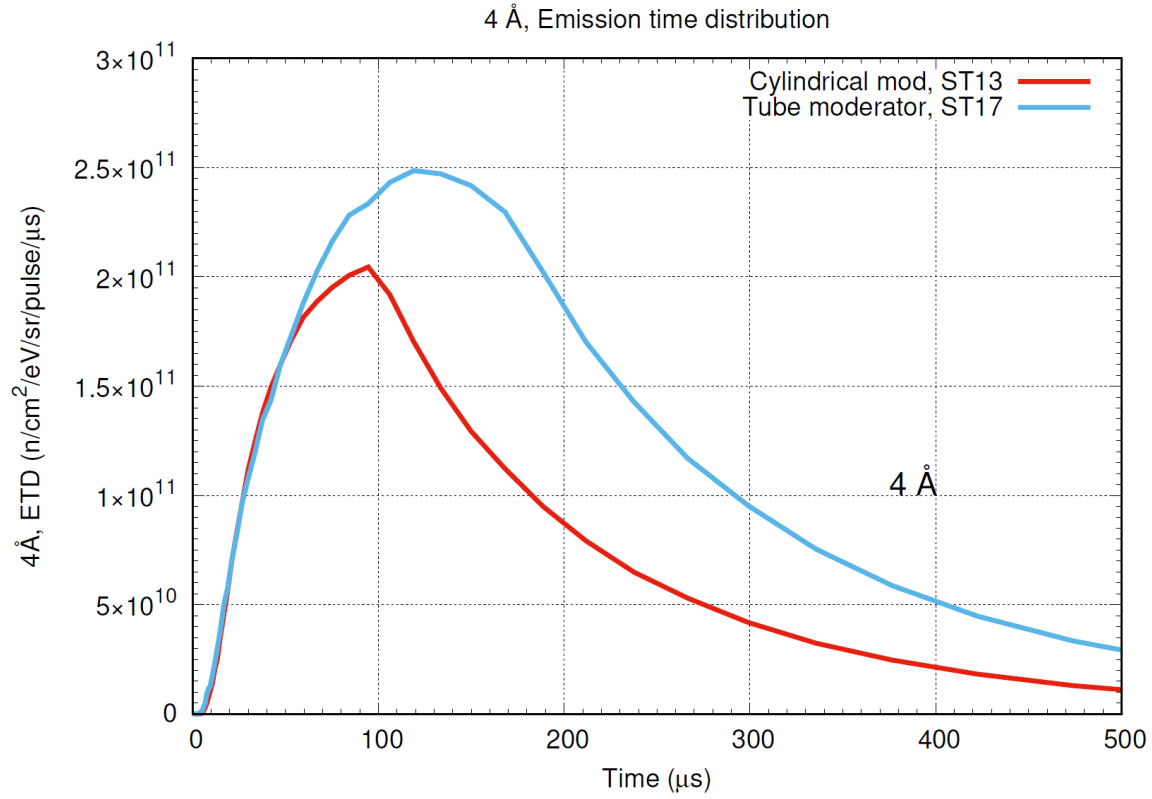


Figure 3. Emission time distribution for the chosen optimized configurations of the 2 moderators at 4 Å.

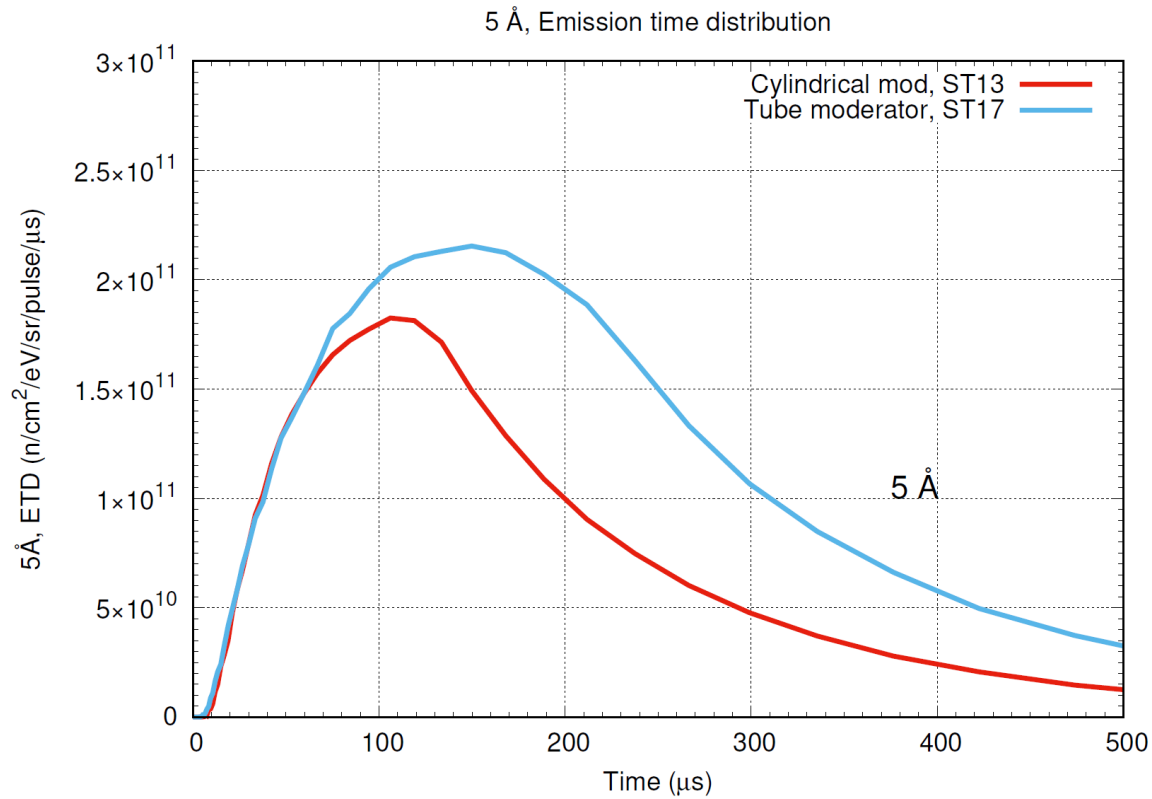


Figure 4. Emission time distribution for the chosen optimized configurations of the 2 moderators at 5 Å.

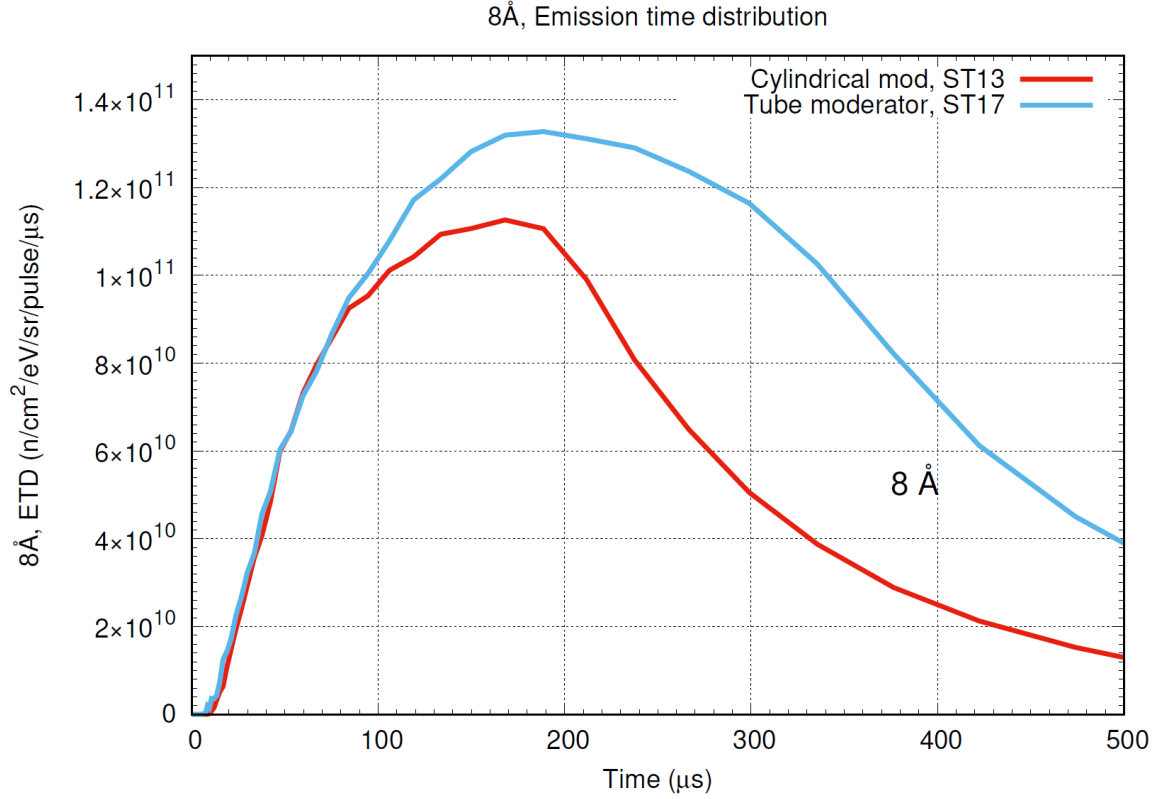


Figure 5. Emission time distribution for the chosen optimized configurations of the 2 moderators at 8Å.

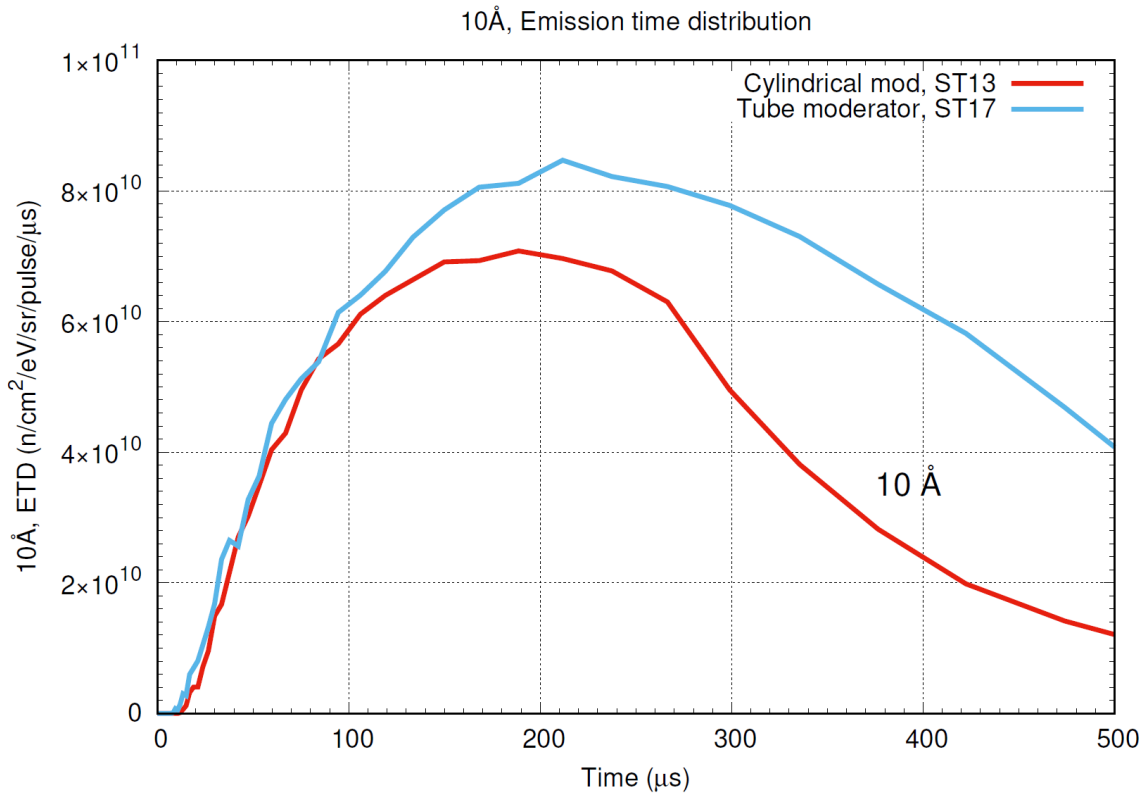


Figure 6. Emission time distribution for the chosen optimized configurations of the 2 moderators at 10Å.

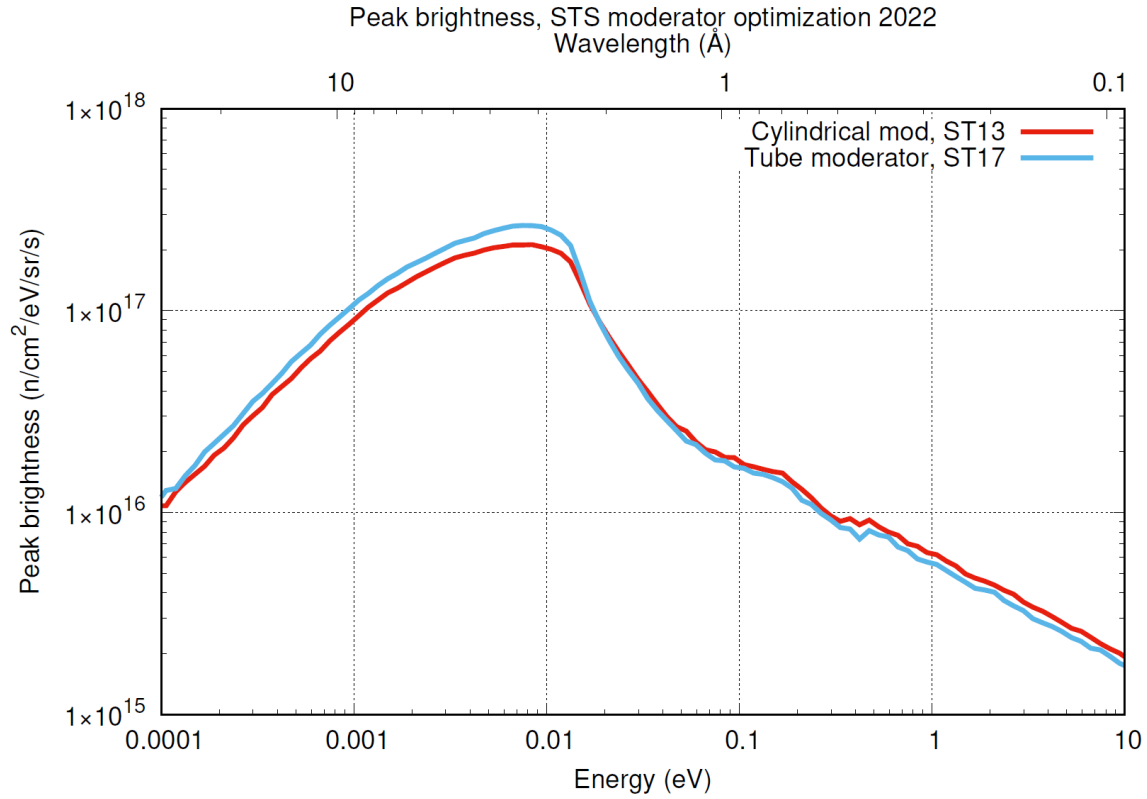


Figure 7. Peak brightness for the chosen optimized configurations of the 2 moderators (log scale).

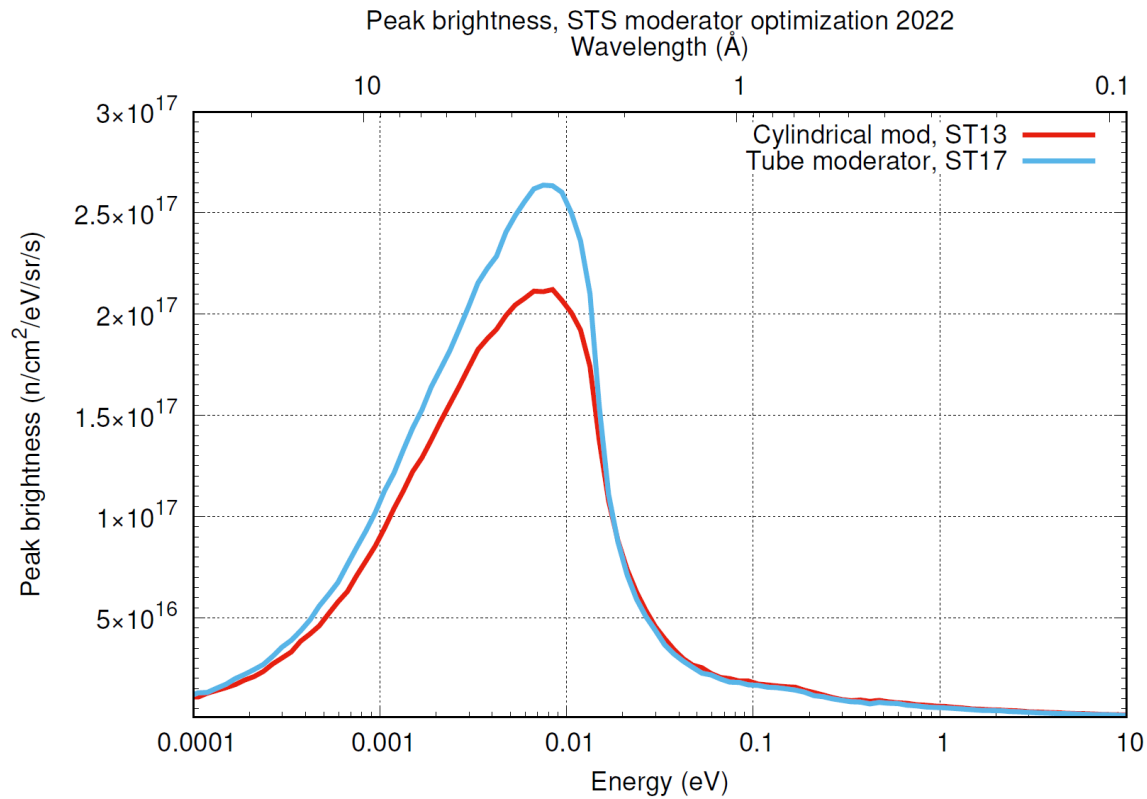


Figure 8. Peak brightness for the chosen optimized configurations of the 2 moderators (linear scale).

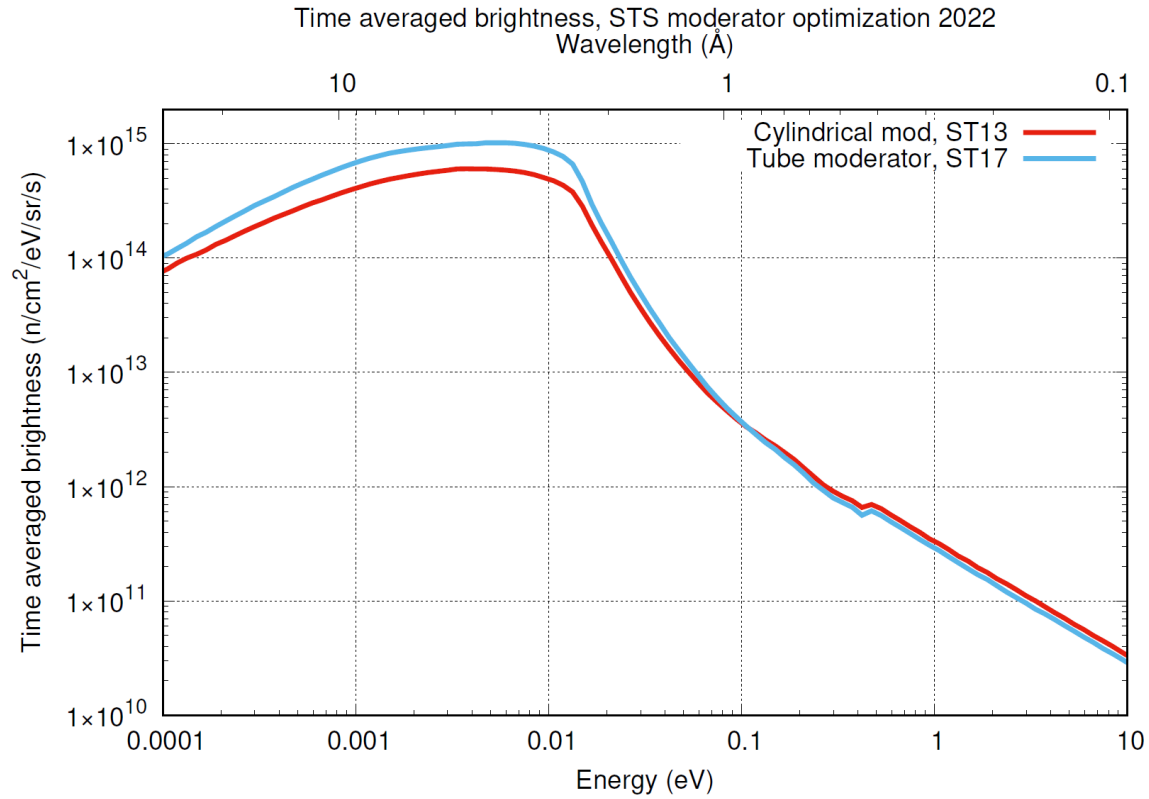


Figure 9. Time-average brightness for the chosen configurations of the 2 moderators (log scale).

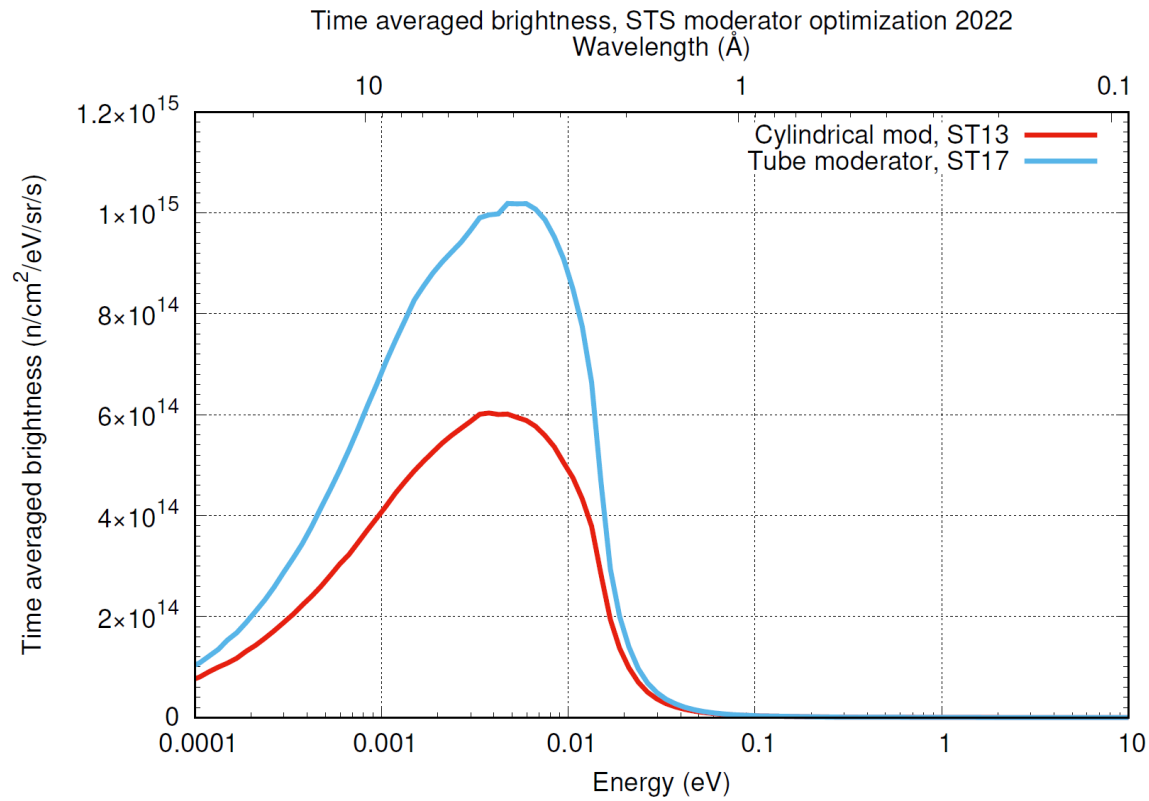


Figure 10. Time-average brightness for the chosen configurations of the 2 moderators (linear scale).

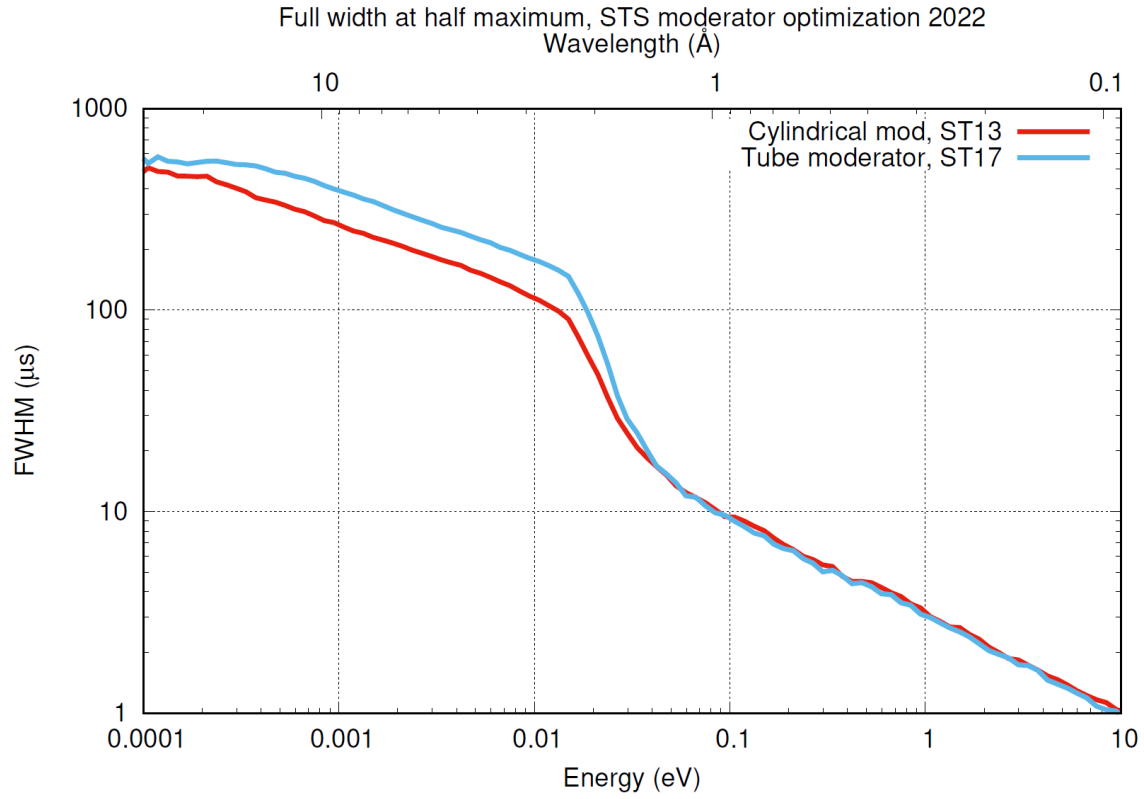


Figure 11. Full Width at Half Maximum for the chosen configurations of the 2 moderators (log scale).

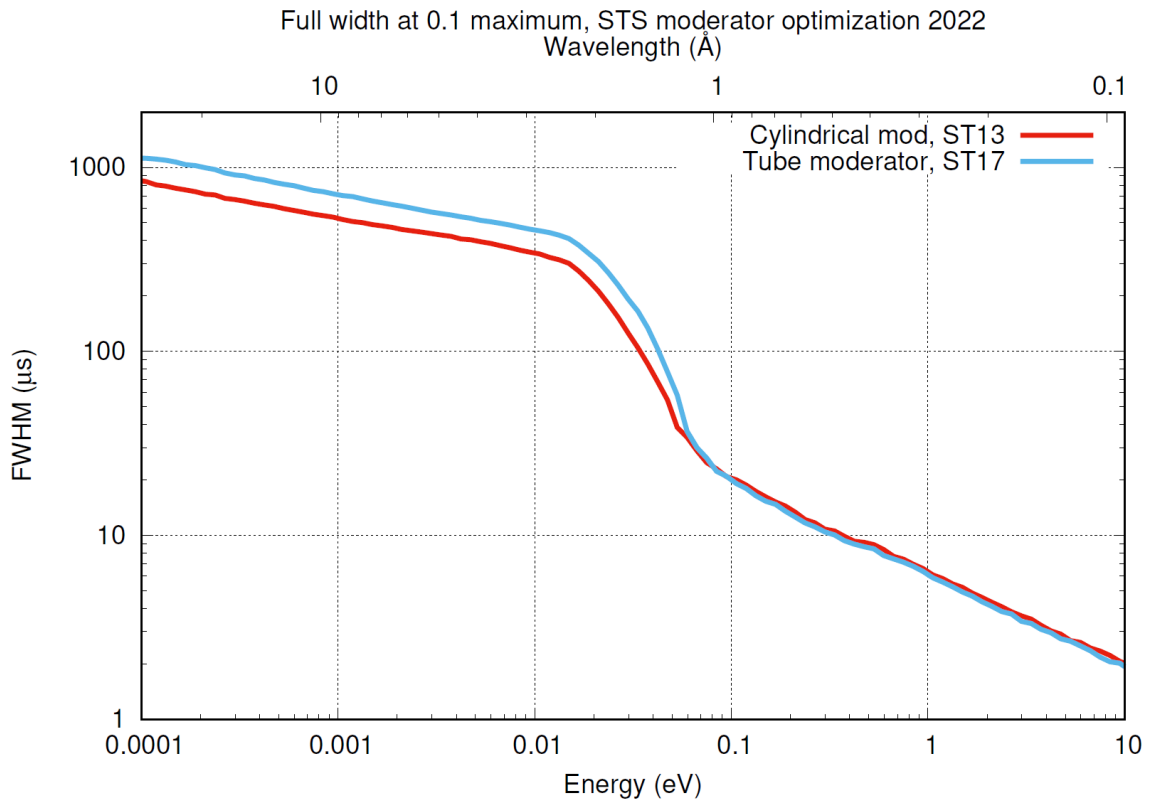


Figure 12. Full Width at 0.1 Maximum for the chosen configurations of the 2 moderators (log scale).

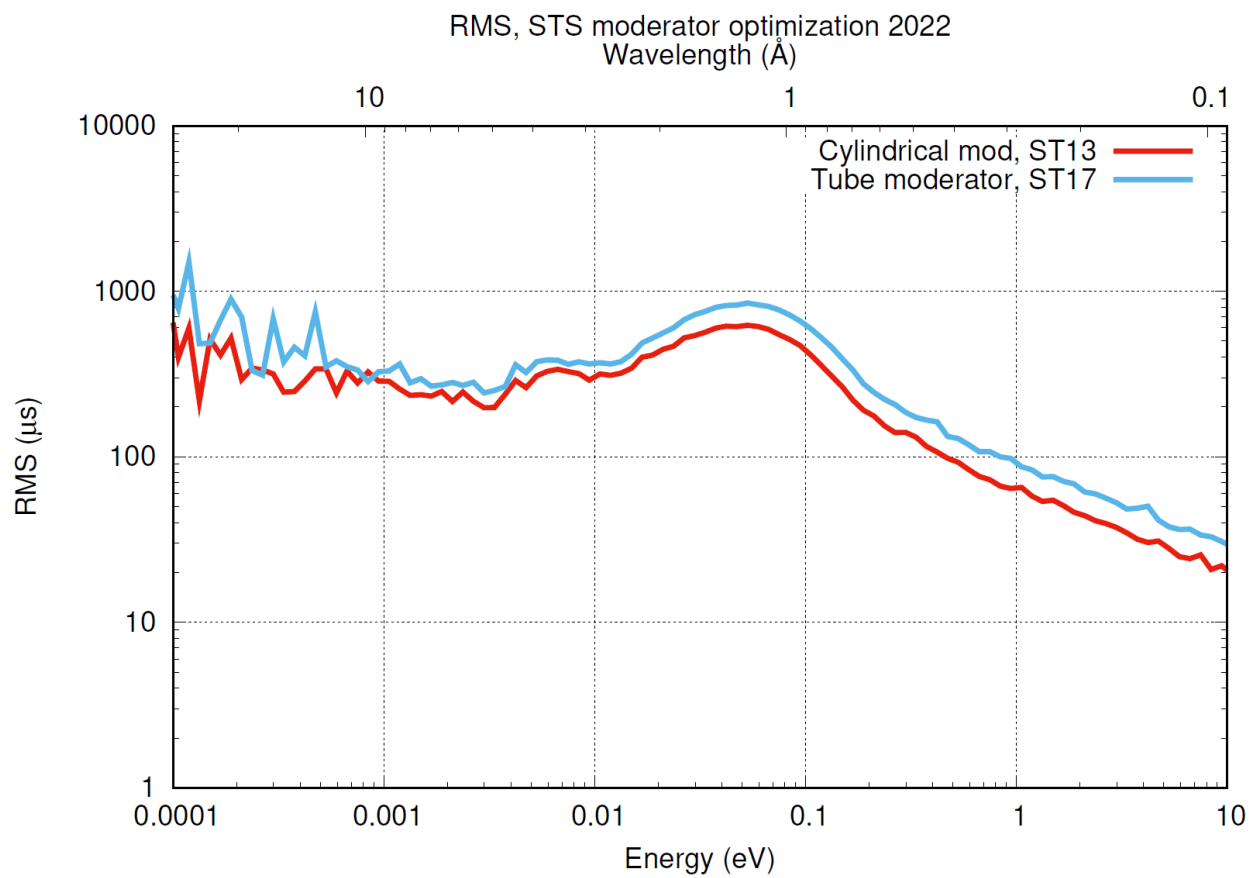


Figure 13. Root mean square for the chosen configurations of the 2 moderators (log scale).

## 5.2.2 Interface Geometry

As described in the Conceptual Design Report [2], the STS design will feature a total of 22 beamlines. The upper moderator, located just above the target, will be viewed by 16 of those beamlines, while the lower moderator, located just beneath the target, will be viewed by the remaining 6 beamlines. The angular orientation of each beamline and which moderator each beamline views is shown in Table 1 and Figure 14 below. The viewed area geometry, guide entrance geometry, and guide entrance distance from the moderator viewed face is also listed in Table 1. The characteristic size of the viewed face of the moderators will be 30 mm, as discussed in reference [3].

Table 1. STS Beamline Geometry

Beamline	Angle from Proton Beam	Moderator	Viewed Area Geometry	Guide Entrance Geometry	Guide Entrance Distance
ST01	-145°	Lower	Ø30mm Circle	50mm Square	806.5mm
ST02	-134°	Upper	30mm Square	50mm Square	1018.5mm
ST03	-123°	Upper	30mm Square	50mm Square	1016.5mm
ST04	-112°	Upper	30mm Square	See 5.2.2.1	2000mm
ST05	-101°	Upper	30mm Square	50mm Square	1018.5mm
ST06	-90°	Lower	Ø30mm Circle	50mm Square	806.5mm
ST07	-79°	Upper	30mm Square	50mm Square	1018.5mm
ST08	-68°	Upper	30mm Square	50mm Square	1016.5mm
ST09	-57°	Upper	30mm Square	50mm Square	1016.5mm
ST10	-46°	Upper	30mm Square	50mm Square	1018.5mm
ST11	-35°	Lower	Ø30mm Circle	50mm Square	1003.5mm
ST12	35°	Lower	Ø30mm Circle	50mm Square	1003.5mm
ST13	46°	Upper	30mm Square	50mm Square	1018.5mm
ST14	57°	Upper	30mm Square	50mm Square	1016.5mm
ST15	68°	Upper	30mm Square	50mm Square	1016.5mm
ST16	79°	Upper	30mm Square	50mm Square	1018.5mm
ST17	90°	Lower	Ø30mm Circle	50mm Square	806.5mm
ST18	101°	Upper	30mm Square	50mm Square	1018.5mm
ST19	112°	Upper	30mm Square	50mm Square	1016.5mm
ST20	123°	Upper	30mm Square	50mm Square	1016.5mm
ST21	134°	Upper	30mm Square	50mm Square	1018.5mm
ST22	145°	Lower	Ø30mm Circle	50mm Square	806.5mm

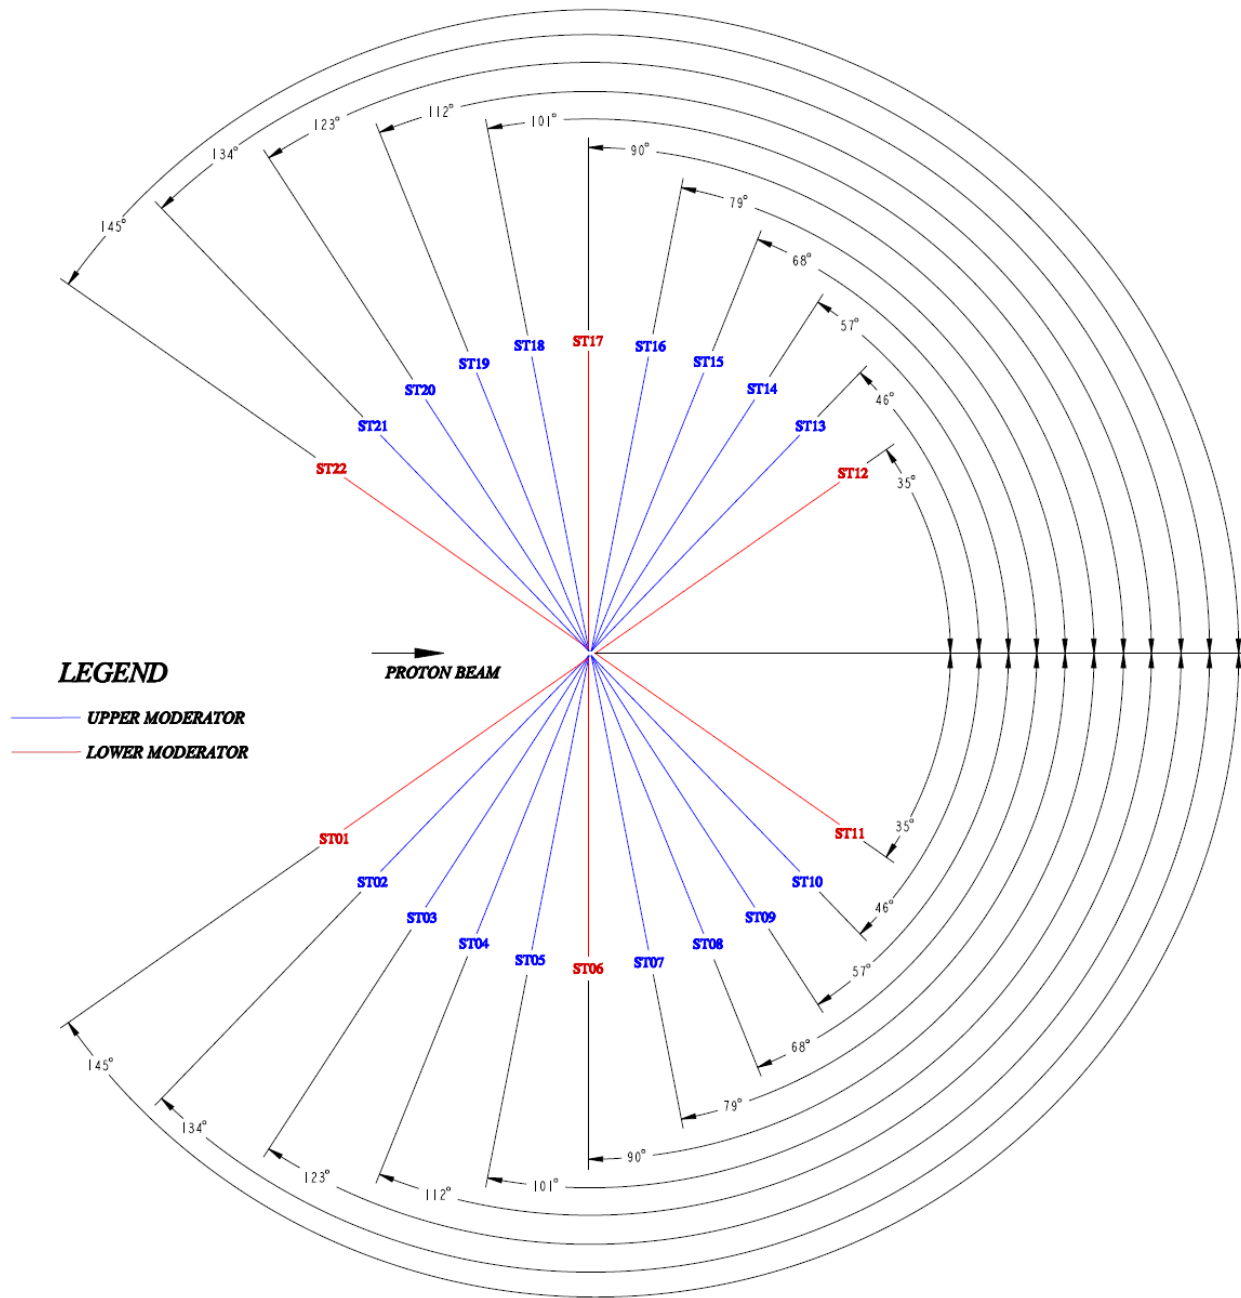


Figure 14. Overall Beamline Angle Layout Plan View. Angles Defined Relative to the Proton Beam Direction.



Figures 15,16, and 17 define the beamline origins on the viewed faces of the hydrogen moderators. The beamline origins are located on the outer surface of the hydrogen. Detailed preliminary engineering of the Target Assembly is ongoing; therefore, the proton beam center horizontal plane to moderator center distances depicted in Figure 13 will see adjustments in a future revision expected in mid-2023.

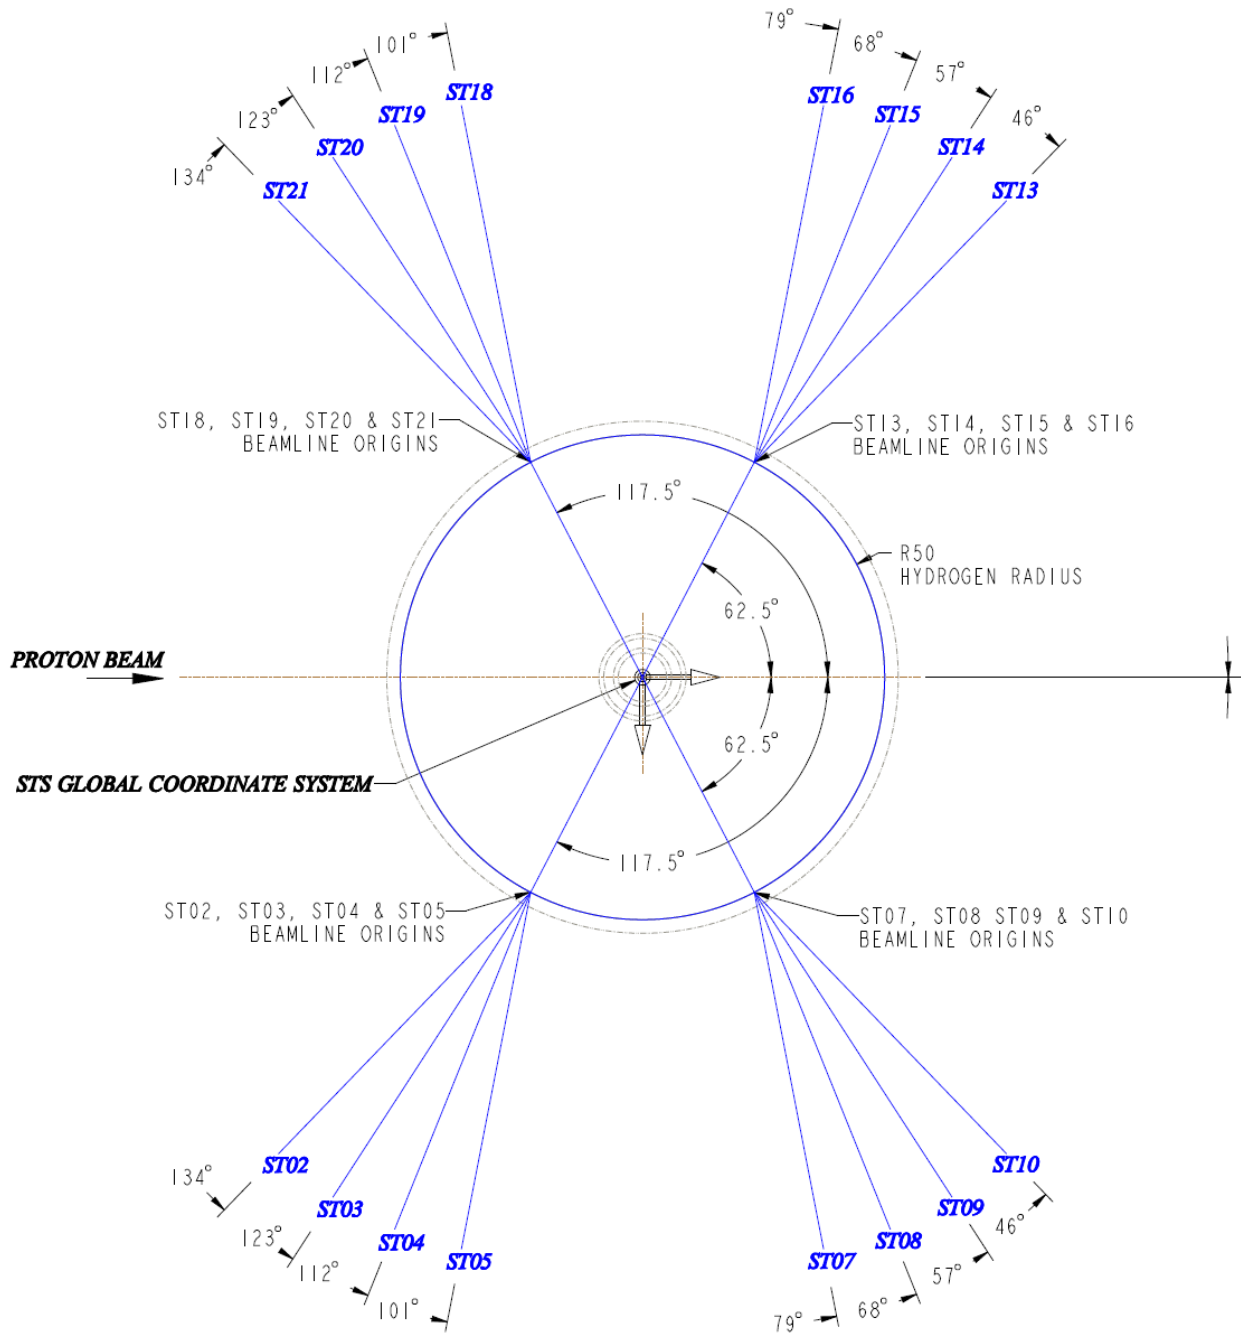


Figure 15. Cylinder Moderator Beamline Layout Plan View (dimensions in mm).  
 Cylinder Moderator Vertical Axis is Aligned with the STS Global Coordinate System Vertical Axis.  
 Hydrogen Boundary and Beamlines are Shown in Blue.

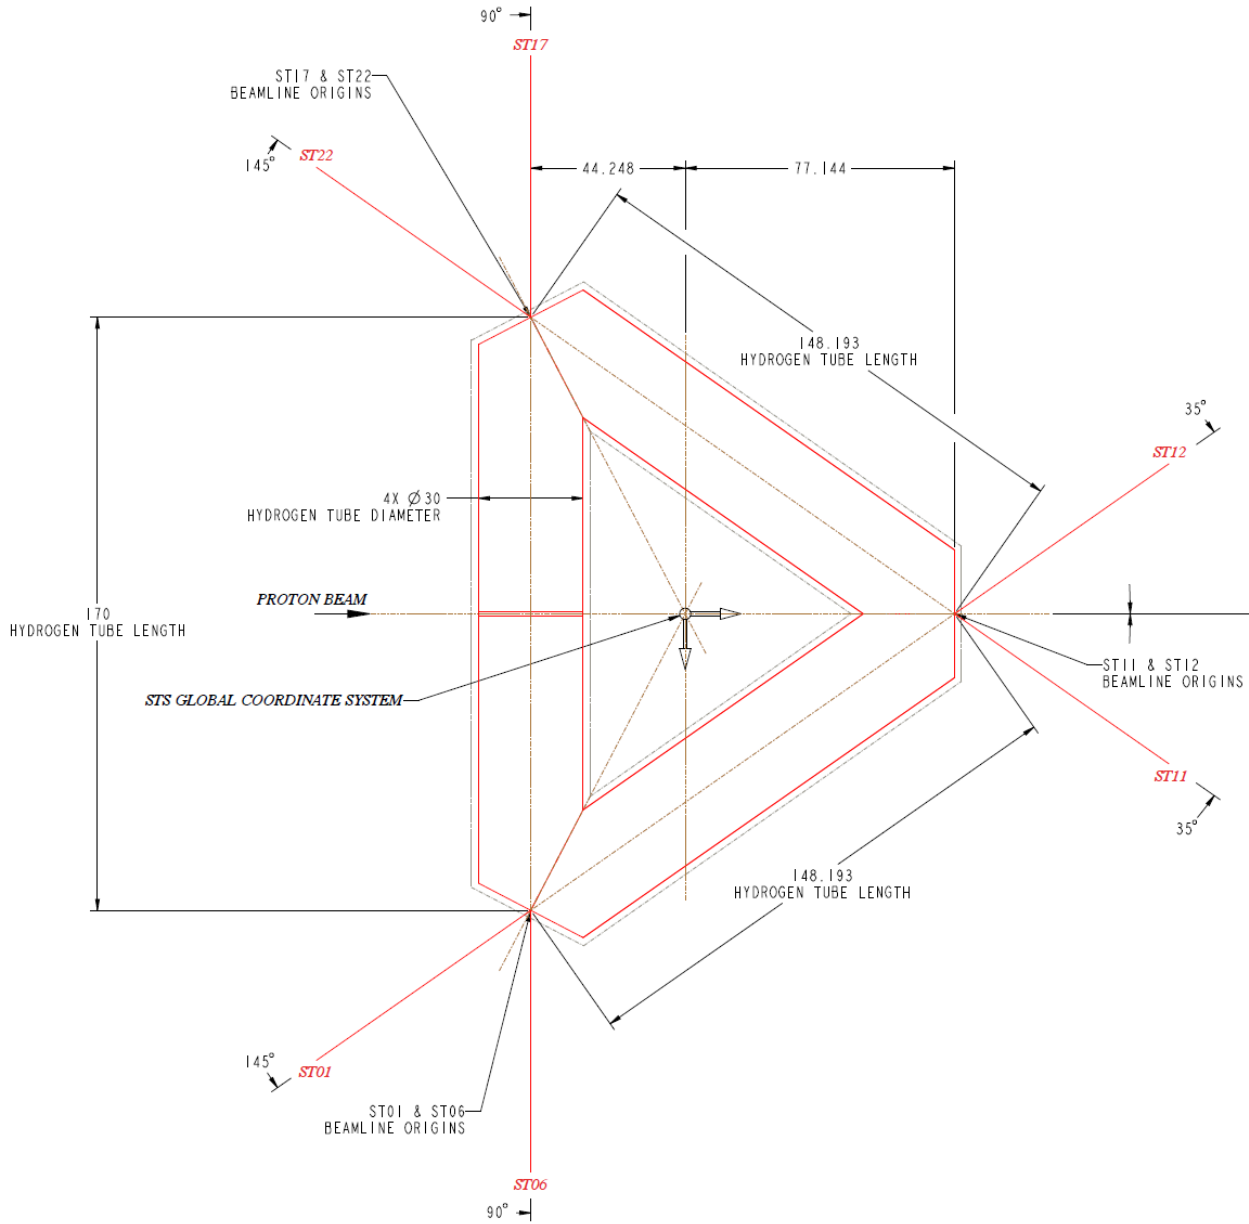


Figure 16. Tube Moderator Beamline Layout Plan View (dimensions in mm).  
 Tube Moderator Angular Bisector Intersection is Aligned with the STS Global Coordinate System  
 Vertical Axis. Hydrogen Boundary and Beamlines are Shown in Red.

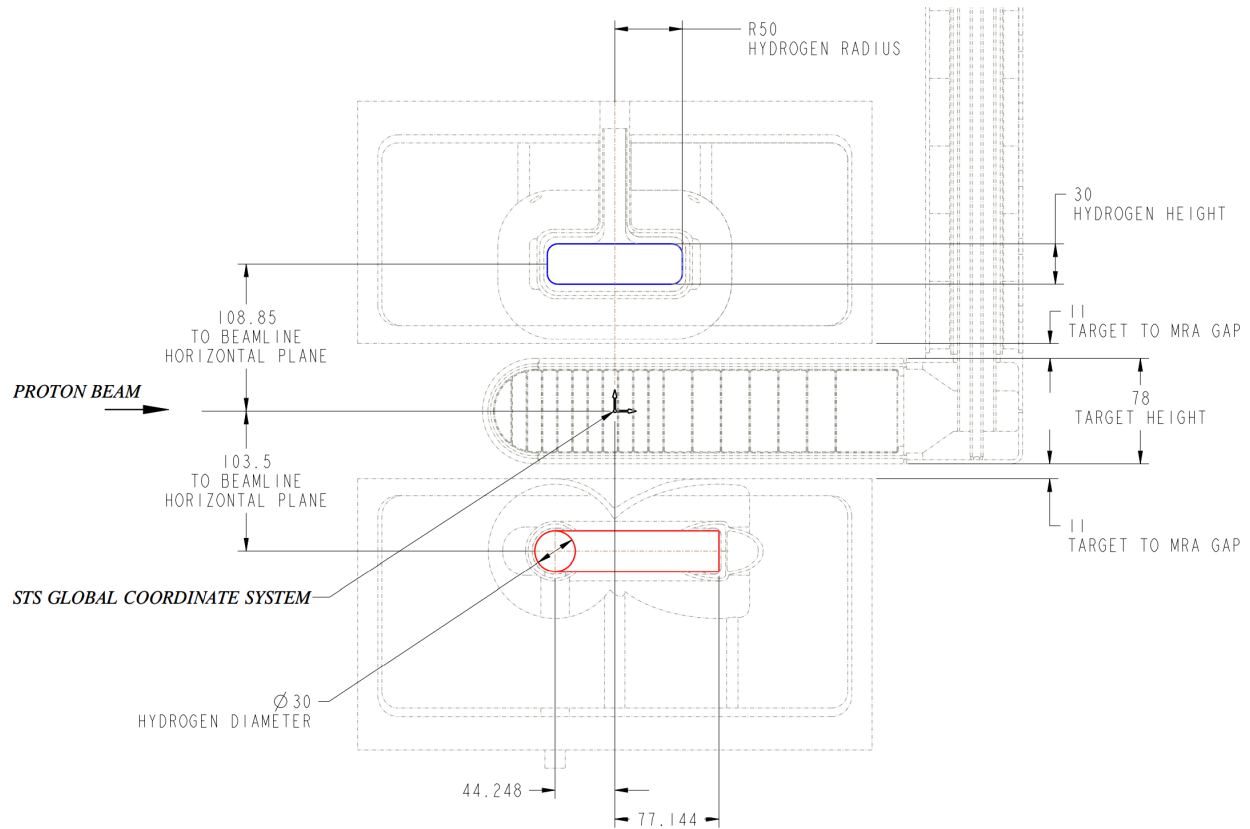


Figure 17. Moderator Vertical Cross-section Along Proton Beam Axis (dimensions in mm). Cylinder Moderator Hydrogen Boundary is Shown in Blue. Tube Moderator Hydrogen Boundary is Shown in Red.

### 5.2.2.1 Beamline ST04 Geometry

The ST04 beamline will house the QIKR instrument, a horizontal-sample-surface reflectometer, which will feature 2 independent beamlines offset 2.5 degrees from horizontal, one up and one down, as shown in Figure 18. Each beamline is also angled horizontally from the nominal beamline angle to allow space for the independent beamlines and sample locations as shown in Figure 19. The dimensions of the rectangular guide entrances at the distance given in Table 1 from the moderator viewed face are shown in Table 2.

Table 2. ST04 Rectangular Guide Entrance Geometry

Beamline	Guide Entrance Width	Guide Entrance Height
ST04-U	30mm	37mm
ST04-L	30mm	41mm

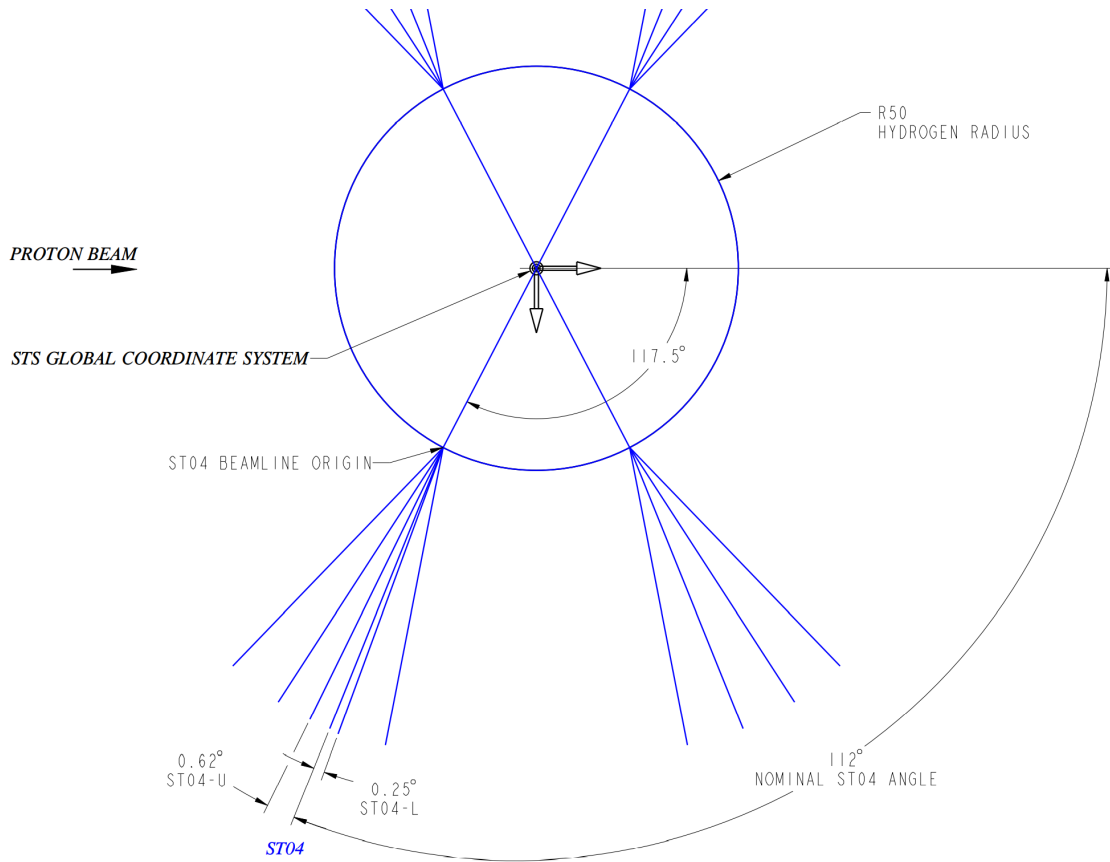


Figure 18. ST04-U and ST04-L Plan View (dimensions in mm, angles are not to scale for clarity).

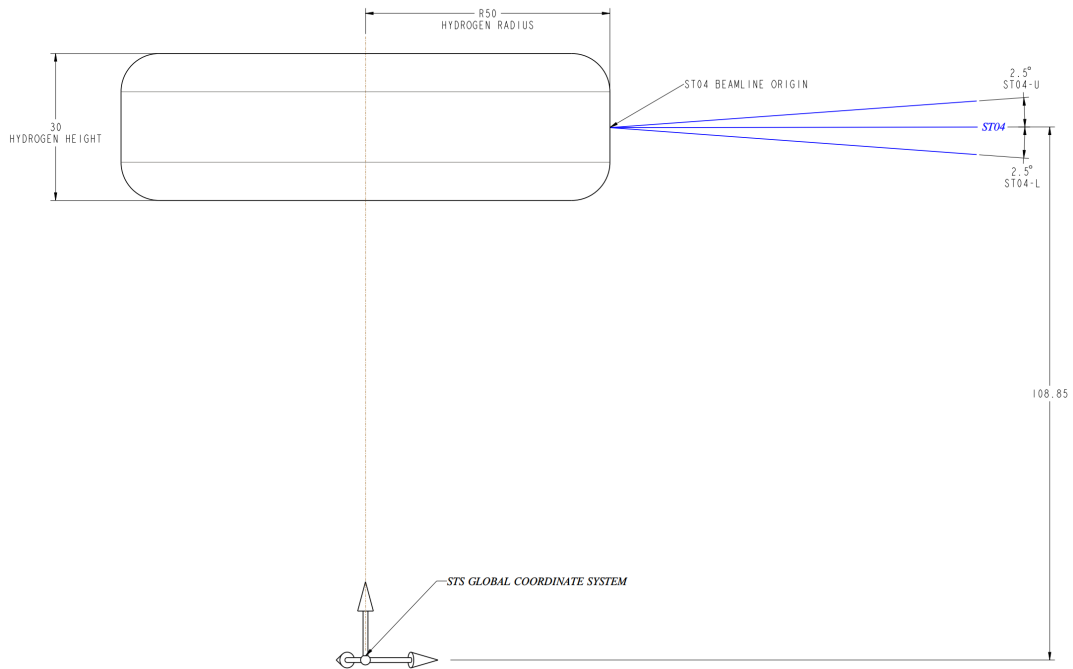


Figure 19. ST04-U and ST04-L Vertical Cross-section through ST04 Layout (dimensions in mm, angles are not to scale for clarity).